



- High performance thermoplastic material which resists rust and corrosion
- Plastic outlet box for use with non-metallic sheathed cable in any residential or light commercial application
- Integral clamps for easier installation with lower installation cost



Intertek


- Conforms to UL514C
- Meets NEMA OS-2
- 2 Hour fire rating



HV-APB02N



HV-APB03N

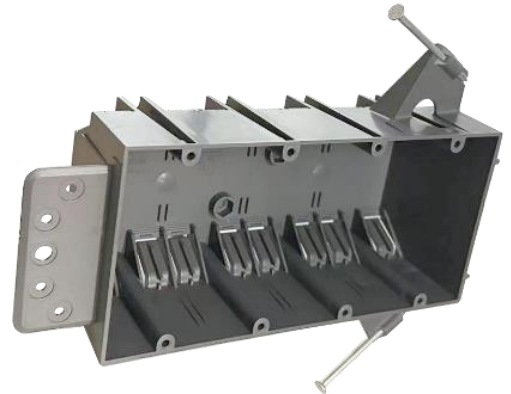

HV-APB04N

ITEM	DESCRIPTION	VOL (cu.in.)	Dimensions L (in.)	Dimensions W (in.)	Dimensions H (in.)
HV-APB02N	2-Gang with six integral clamps, captive nail mounting	32	4.00	3.75	3.00
HV-APB03N	3-Gang with ten integral clamps, captive nail and bracket support mounting	44	5.870	3.75	2.75
HV-APB04N	4-Gang with twelve integral clamps, captive nail and bracket support mounting	55	7.70	3.75	2.75

30 Airport Drive
Wappingers Falls, NY 12590

Phone: (877) 803-1478