



- High performance thermoplastic material which resists rust and corrosion
- Plastic outlet deep box for use with non-metallic sheathed cable in any residential or light commercial application
- Integral clamps for easier installation with lower installation cost



Intertek


- Conforms to UL514C
- Meets NEMA OS-2
- 2 Hour fire rating



HV-APB02DN



HV-APB03DN

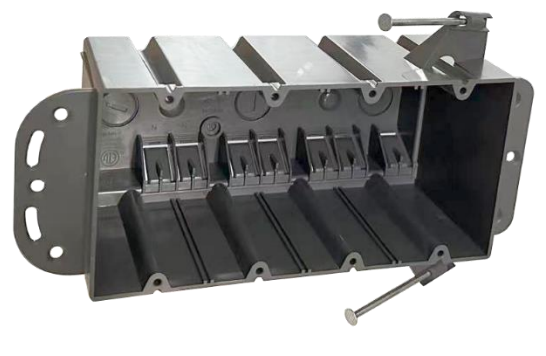

HV-APB04DN

| ITEM | DESCRIPTION | VOL (cu.in.) | Dimensions L (in.) | | Dimensions W (in.) |
|------------|---|-----------------|-----------------------|--|-----------------------|
| HV-APB02DN | 2-Gang with six integral clamps, captive nail and bracket support mounting | 44 | 4.00 | | 3.75 |
| HV-APB03DN | 3-Gang with ten integral clamps, captive nail and bracket support mounting | 68 | 5.87 | | 3.75 |
| HV-APB04DN | 4-Gang with fourteen integral clamps, captive nail and bracket support mounting | 87 | 7.70 | | 3.75 |

30 Airport Drive
Wappingers Falls, NY 12590

Phone: (877) 803-1478